

University of Wollongong  
**Research Online**

---

Faculty of Engineering and Information  
Sciences - Papers: Part B

Faculty of Engineering and Information  
Sciences

---

2020

## Combined General Vector Machine for Single Point Electricity Load Forecast

Binbin Yong

*University of Wollongong, yongbb14@lzu.edu.cn*

Yongqiang Wei

Jun Shen

*University of Wollongong, jshen@uow.edu.au*

Fucun Li

*University of Wollongong, fl626@uowmail.edu.au*

Xuetao Jiang

*See next page for additional authors*

Follow this and additional works at: <https://ro.uow.edu.au/eispapers1>



Part of the [Engineering Commons](#), and the [Science and Technology Studies Commons](#)

---

### Recommended Citation

Yong, Binbin; Wei, Yongqiang; Shen, Jun; Li, Fucun; Jiang, Xuetao; and Zhou, Qingguo, "Combined General Vector Machine for Single Point Electricity Load Forecast" (2020). *Faculty of Engineering and Information Sciences - Papers: Part B*. 3762.

<https://ro.uow.edu.au/eispapers1/3762>

Research Online is the open access institutional repository for the University of Wollongong. For further information contact the UOW Library: [research-pubs@uow.edu.au](mailto:research-pubs@uow.edu.au)

---

# Combined General Vector Machine for Single Point Electricity Load Forecast

## Abstract

General Vector Machine (GVM) is a newly proposed machine learning model, which is applicable to small samples forecast scenarios. In this paper, the GYM is applied into electricity load forecast based on single point modeling method. Meanwhile, traditional time series forecast models, including back propagation neural network (BPNN), Support Vector Machine (SVM) and Autoregressive Integrated Moving Average Model (ARIMA), are also experimented for single point electricity load forecast. Further, the combined model based on GYM, BPNN, SVM and ARIMA are proposed and verified. Results show that GYM performs better than these traditional models, and the combined model outperforms any other single models for single point electricity load forecast.

## Keywords

point, vector, combined, single, machine, general, forecast, load, electricity

## Disciplines

Engineering | Science and Technology Studies

## Publication Details

Yong, B., Wei, Y., Shen, J., Li, F., Jiang, X. & Zhou, Q. (2020). Combined General Vector Machine for Single Point Electricity Load Forecast. The 9th International Conference on Frontier Computing (FC2019) Theory, Technologies and Applications (pp. 284-290). LNEE: Springer.

## Authors

Binbin Yong, Yongqiang Wei, Jun Shen, Fucun Li, Xuetao Jiang, and Qingguo Zhou

# Combined General Vector Machine for Single Point Electricity Load Forecast

Binbin Yong<sup>1,2</sup>, Yongqiang Wei<sup>1</sup>, Jun Shen<sup>3,4</sup>, Fucun Li<sup>3</sup>, Xuetao Jiang<sup>1</sup>, and  
Qingguo Zhou<sup>1</sup> \*

<sup>1</sup> School of Information Science and Engineering,  
Lanzhou University, Lanzhou, Gansu, China  
{yongbb,weiyq18,jiangxt18,zhouqg}@lzu.edu.cn

<sup>2</sup> School of Physical Science and Technology,  
Lanzhou University, Lanzhou, Gansu, China

<sup>3</sup> School of Information Systems and Technology,  
University of Wollongong, NSW, Australia  
jshen@uow.edu.au, f1626@uowmail.edu.au

<sup>4</sup> Department of EE and CS, Research Lab of Electronics,  
Massachusetts Institute of Technology, Cambridge, 02139, MA, USA

**Abstract.** General Vector Machine (GVM) is a newly proposed machine learning model, which is applicable to small samples forecast scenarios. In this paper, the GVM is applied into electricity load forecast based on single point modeling method. Meanwhile, traditional time series forecast models, including back propagation neural network (BPNN), Support Vector Machine (SVM) and Autoregressive Integrated Moving Average Model (ARIMA), are also experimented for single point electricity load forecast. Further, the combined model based on GVM, BPNN, SVM and ARIMA are proposed and verified. Results show that GVM performs better than these traditional models, and the combined model outperforms any other single models for single point electricity load forecast.

**Keywords:** General Vector Machine, Electricity load forecast, Time series forecast, Combined model


## 1 Introduction

Electricity load forecast is the base of electrical power system planning, which plays an important role in insurance of national life and stability of social economy. Hence, it has been a widely studied issue and many forecast methods are proposed. As a classical statistical learning model, Back propagation neural network (BPNN) is proved effective for electricity load [1]. However, limited to the finite training samples and surplus hidden nodes, BPNN often suffers from the over-fitting problem [2]. As shown in Fig. 1, the overall cost, which represents the error between actual values and forecasting values, usually has different trends

---

\* Corresponding author: zhouqg@lzu.edu.cn

in training samples and test samples. Generally, test cost will firstly reduce together with the training cost, and then it might increase after a minimum value. It means, BPNN model could possibly perform well on training samples, while it results in a poor performance for new situations.

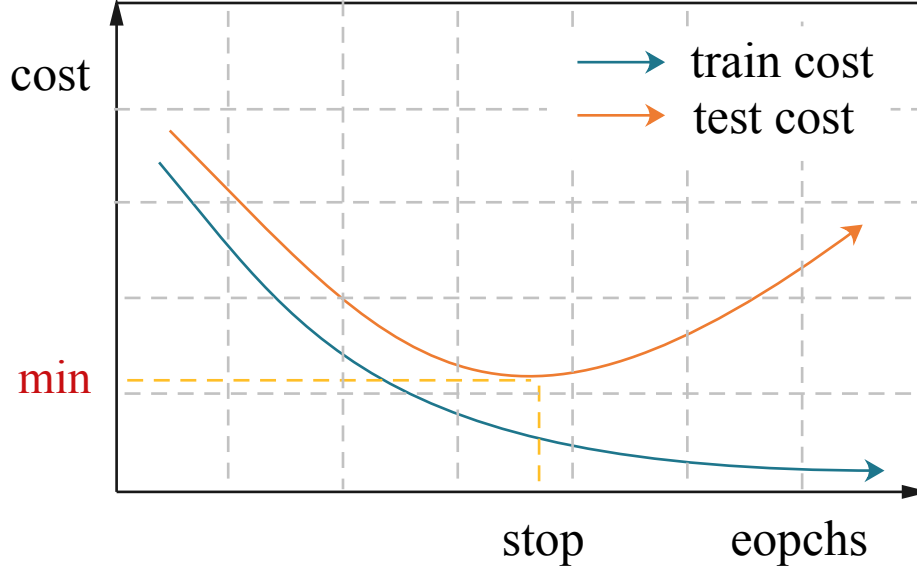

**Fig. 1.** The display of over fitting.

Due to the over-fitting problem, BPNN has issues in many different time series forecast scenarios. Meanwhile, over-fitting issue remains a controversial issue in the academic field. In order to deal with the problem, many approaches were proposed to eliminate the over-fitting phenomena [3].

Then, based on SLT, Vanpik proposed the famous Support Vector Machine (SVM) [4], which has solid theoretical foundation and tries to find a hyperplane that separates samples with a largest margin, is proved to be very effective for small samples. SVM evolves in a quicker pace than BPNN due to its solid theoretical foundation and excellent generalization ability for small samples [5,6]. However, in the case when the training samples is vary small, SVM may select noise samples as support vectors, and hence misses the optimal model. Since Hiton proposed deep learning [7] in 2006, the neural network recovers once again. Arguments about the merits and demerits of neural network and SVM continues [8,9]. Meanwhile, some researchers try to find models that ensemble both the advantages of BPNN and SVM.


General Vector Machine (GVM) [10,11], which has a basic structure of three-layer neural network, is designed as a mixer model of neural network and SVM. In fact, GVM is applicable to cases of lacking samples [12,13], and it has been

successfully applied in time series forecast problem, such as electricity demand forecast [14]. Meanwhile, development of modern technology generates the demand for more accurate electricity forecast. Therefore, many traditional models, e.g. BPNN [15], SVM [16,17] are widely researched in electricity load forecast. In addition to the traditional models, some alternative approaches are also explored [18,19]. Unfortunately, due to the instability of electricity demand, electricity load forecast is still a great challenge. In this paper, we firstly applied GVM, BPNN, SVM and ARIMA into electricity load forecast. Then, the combined model of these four types models are researched.

The remainder of this paper is organized as follows. The introduction of GVM model is displayed in Section 2. Section 3 shows the single point forecast models, and applies it into electricity load forecast. The experiments and analysis are given in Section 4. At last, Section 5 concludes our work.

## 2 GVM model and the Monte Carlo training algorithm

The GVM model and its training algorithm are shown in Fig. 2. Instead of support vectors, general vectors make the model not sensitive to individual sample, so as to gain the generalization ability of GVM model. In contrast to neural network, in the design of GVM, the parameter  $\beta$  is imported into the hidden nodes to reduce the design risk. By adjusting  $\beta$ , GVM will keep robust for small fluctuations of the input feature vector.

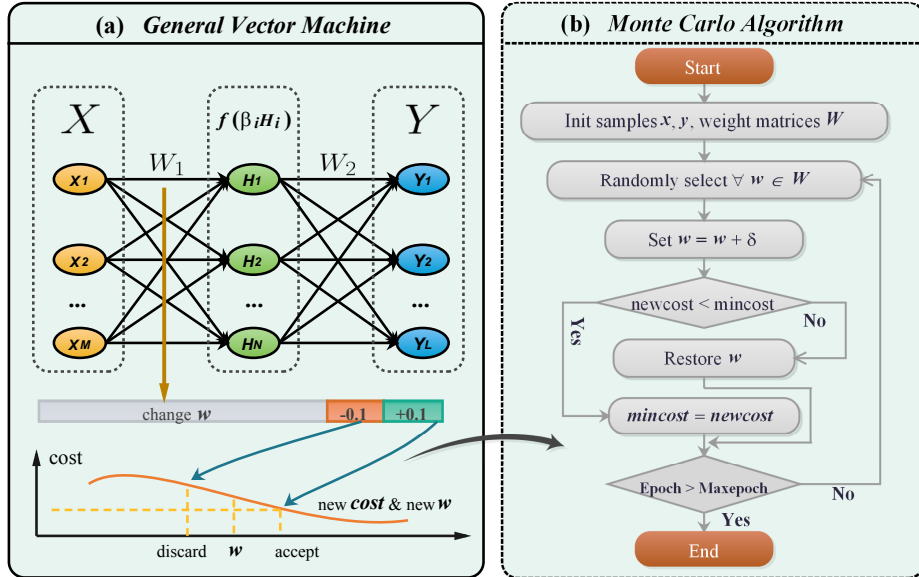

**Fig. 2.** (a) The structure of GVM. (b) The MC algorithm used to train GVM model.

GVM introduces the Monte Carlo (MC) algorithm to train the model. The basic idea of training GVM is that the change of a weight would be accepted while the overall cost decreases. Specifically, it randomly changes one weight of the weight matrices in a small deviation, and GVM will accept the weight change while the overall cost is reduced. By this way, the training GVM model will gradually converge to a stable state. The pseudo-code of generating a new weight is given in Function (1), which repeatedly and randomly finds a new weight near the old one until the new weight is within the weight range.

---

**Function (1) Generate a new weight**


---

**Input:**

- 1: *index* index of weights (including  $W_\beta$ ,  $W_1$ ,  $W_b$ ) to change
- 2:  $W$  represents  $W_\beta$ ,  $W_1$ ,  $W_b$
- 3:  $WR$  range of weight matrices
- 4: *step* range of weights change

**Output:** new weight

- 5: **function** NEWW(*index*,  $W$ ,  $WR$ , *step*)
  - 6:      $newW \leftarrow W[index]$
  - 7:     **repeat**
  - 8:          $\delta \leftarrow rand() * step$
  - 9:          $newW \leftarrow newW + \delta$
  - 10:     **until**  $abs(newW) \leq WR$
  - 11:     **return**  $newW$
  - 12: **end function**
- 

### 3 Single point forecast modeling and the combined model

In this paper, we focus on the forecast models for electricity load forecast. The electricity load data is collected from Queensland in Australia every half-hour, which means that there are 48 electricity load data per day. We select the data ranging from May 2, 2011 to July 3, 2011, which includes 3,024 data of 9 weeks. As shown in Fig. 3, a single point forecast model is constructed with 7 input nodes and 1 output node. The first 8 weeks data is used as the training data, in which the first 7 weeks data is used as the input vector and the eighth week data are seen as the output vector. When testing, the data from the second week to the ninth week is used as the test data, in which the data from the second week to the eighth week is used as input vector and the data of the ninth week is used as the output vector. The models to forecast the above input-output include GVM, BPNN, SVM and ARIMA. As talked above, BPNN represents a three-layer neural network, which is trained by back propagation algorithm. GVM is trained by MC algorithm. For SVM, time series forecast is in fact a regression problem (also called SVR). According to our experiments, the usage of radial basis function (RBF) as kernel function achieves better forecast results.

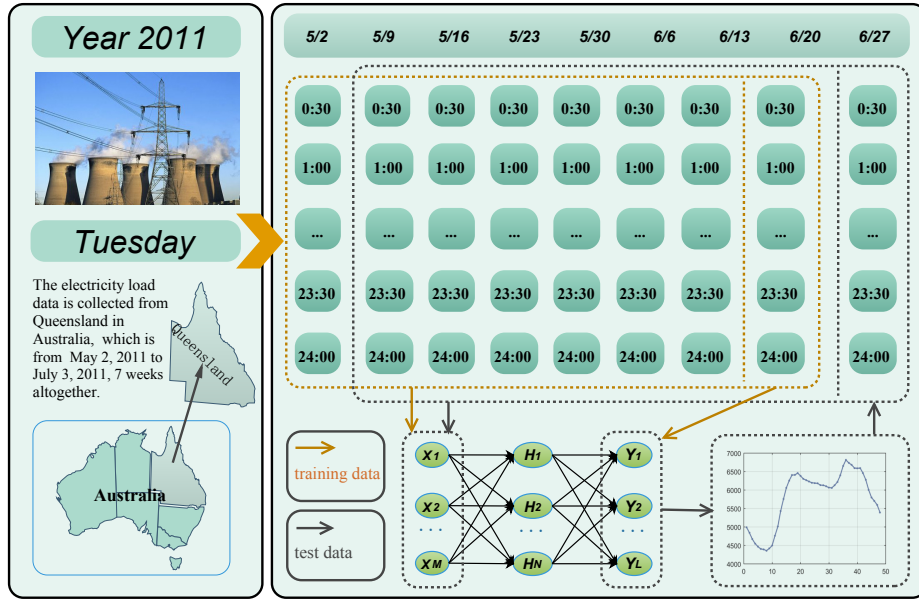


Fig. 3. Single point forecast modeling.

When selecting the parameters of regularization (penalty coefficient)  $c$  and kernel width (radius of kernel function)  $g$ , the grid method is used to search the best regularization parameter  $c$  and kernel parameter  $g$ .

In order to further improve the forecast performance, we try to combine the GVM, BPNN, SVM and ARIMA models. Similar to the training algorithm of GVM, the combined model is trained by Monte Carlo (MC) algorithm. That is, the weights of these four component models are initialized equally. Then, the weights are randomly changed in a small range, and the change of reducing the overall cost will be accepted.

## 4 Experiments and analysis

In this section, we will show the experiments results of single point forecast models and the combined model. Four metrics including Mean Absolute Percentage Error (MAPE), Mean Absolute Error (MAE) and Root Mean Square Error (RMSE) are used to evaluate the performances of these models.

### 4.1 Comparisons on the single point forecast models

For SVM model, we search the parameters  $c$  and  $g$  from  $2^{-10}$  to  $2^{10}$  divided by 0.1 to find the best pairs of  $c$  and  $g$ , and the best parameters are listed in Table. 1.

**Table 1**The best regularization parameter  $c(2^x)$  and the kernel parameter  $g(2^x)$  of SVM model.

	Mon.	Tue.	Wed.	Thu.	Fri.	Sat.	Sun.	All
$c(2^x)$	6.20	10.0	0.49	8.15	10.0	9.90	-0.50	-5.29
$g(2^x)$	-8.48	-8.12	-8.48	-2.65	-4.00	-4.10	-3.10	-3.89

The single point forecast results of four types models including GVM, GVM, BPNN, SVM and ARIMA are shown in Table 2. The best forecast results of single models are highlighted in boldfaces, which mainly occurs in GVM model. By comparing all the original models, we find that GVM performs the best in the models, which proves that GVM is suitable for electricity load forecast.

**Table 2**

Experimental results: the electricity load forecast results of single point models.

	MAPE(%)							
	Mon.	Tue.	Wed.	Thu.	Fri.	Sat.	Sun.	All
GVM	<b>0.9803</b>	<b>1.4591</b>	<b>1.7692</b>	3.1568	2.9631	2.2151	1.5976	<b>2.3614</b>
BPNN	1.7990	1.8836	2.3726	<b>3.0676</b>	3.2271	1.9492	1.5378	2.7536
SVM	3.4149	3.1351	3.1588	4.0683	<b>1.4160</b>	<b>1.5219</b>	<b>1.0536</b>	3.3901
ARIMA	6.5651	4.6551	4.4776	6.4666	5.2850	1.8155	1.1165	4.3696
	MAE							
	Mon.	Tue.	Wed.	Thu.	Fri.	Sat.	Sun.	All
GVM	<b>58.617</b>	<b>86.990</b>	<b>105.03</b>	<b>177.62</b>	170.15	115.07	83.592	<b>131.13</b>
BPNN	104.62	110.32	141.53	182.69	193.01	106.62	82.538	155.23
SVM	196.06	189.32	172.14	230.15	<b>83.890</b>	<b>78.665</b>	82.538	179.49
ARIMA	382.26	269.71	267.67	377.4	300.38	94.516	<b>57.530</b>	249.66
	RMSE							
	Mon.	Tue.	Wed.	Thu.	Fri.	Sat.	Sun.	All
GVM	<b>82.809</b>	<b>110.86</b>	<b>155.52</b>	<b>198.66</b>	185.57	136.68	96.127	<b>156.61</b>
BPNN	134.78	132.80	168.90	202.21	219.74	128.90	104.07	193.13
SVM	237.57	214.14	214.23	301.05	<b>124.48</b>	<b>92.701</b>	104.07	214.28
ARIMA	495.86	339.90	328.75	445.09	341.68	110.81	<b>72.090</b>	301.13

The **boldfaces** are best results.




## 4.2 Comparisons on the combined model

In this subsection, the combined model ensembles GVM, BPNN, SVM and ARIMA are tested. As discussed above, MC algorithm is adopted to find the combined weights of component models. After a period of training, the combined weights almost keep stable, which are shown in Table 3. We can see that the combined models are able to take full use of the advantages of each component model, and achieve higher forecasting precisions than component models. The forecast results of the combined model (red curve) and the actual (blue curve) are shown in Fig. 4. We can see that the electricity load is well forecast.

**Table 3**

Experimental results: the combined weights of component models, and MAPE, MAE, and RMSE of the combined model.

	GVM( $\omega_1$ )	BPNN( $\omega_2$ )	SVM( $\omega_3$ )	ARIMA( $\omega_4$ )	MAPE	MAE	RMSE
Mon.	0.5491	0.3953	0.0329	0.0226	0.92712	51.392	61.277
Tue.	0.5692	0.4255	-0.0079	0.0132	1.1288	65.577	78.902
Wed.	0.3635	0.5963	-0.0343	0.0745	1.3029	77.097	113.24
Thu.	0.2900	0.6502	0.0303	0.0295	1.3792	76.851	101.47
Fri.	0.2317	0.25223	0.2883	0.2277	1.3591	74.714	100.07
Sat.	-0.0848	0.2250	0.7316	0.1283	1.4975	78.753	88.717
Sun.	0.0444	0.0209	0.7470	0.1877	1.0346	53.34	61.441
All	1.6407	0.1281	-0.5353	-0.2335	1.7143	98.975	128.81

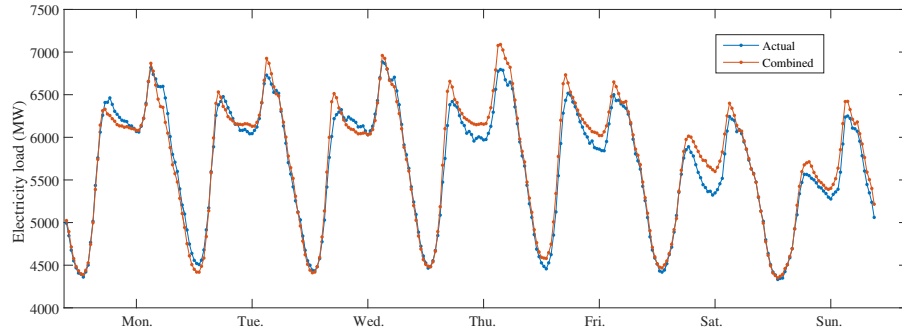

**Fig. 4.** Experimental results: the electricity load forecast results of combined model.

## 5 Conclusion

Electricity load forecast, as an important and difficult time series forecast issue, has been researched by single point modeling method in this paper. As a newly proposed model, GVM has also been applied into electricity load forecast and achieved better forecast results than other traditional forecast models. Further, the combined model ensembles GVM and traditional BP, SVM and ARIMA are explored in this paper. Meanwhile, MC algorithm is pioneered to find the combined weights of the component models. Results demonstrate that the combined models outperforms the component models and MC is effective for training combined model.

## Acknowledgments

This work was partially supported by National Natural Science Foundation of China under Grant No. 61402210, The Fundamental Research Funds for the Central Universities under Grant No. lzujbky-2018-k12, Ministry of Education - China Mobile Research Foundation under Grant No. MCM20170206, Major National Project of High Resolution Earth Observation System under Grant No. 30-Y20A34-9010-15/17, State Grid Corporation Science and Technology Project under Grant No. SGGSKY00FJJS1700302, No. 52272218002K and No. SGGSKY00FJJS1800403, Program for New Century Excellent Talents in University under Grant No. NCET-12-0250, and Strategic Priority Research Program of the Chinese Academy of Sciences with Grant No. XDA03030100.

## References

1. A. Laouafi, M. Mordjaoui, D. Dib, One-hour ahead electric load and wind-solar power generation forecasting using artificial neural network, *Renewable Energy Congress* (2015) 1–6.
2. D. M. Hawkins, The problem of overfitting, *Cheminform* 35 (19) (2004) 1.
3. Y. Gao, X. Kong, C. Hu, Z. Zhang, H. Li, L. Hou, Multivariate data modeling using modified kernel partial least squares, *Chemical Engineering Research & Design* 94 (2015) 466–474.
4. C. Cortes, V. Vapnik, *Support-Vector Networks*, Kluwer Academic Publishers, 1995.
5. C. Sch, I. Laptev, B. Caputo, Recognizing human actions: A local svm approach, *International Conference on Pattern Recognition* 3 (2004) 32–36.
6. L. J. Cao, F. E. H. Tay, Support vector machine with adaptive parameters in financial time series forecasting, *IEEE Transactions on Neural Networks* 14 (6) (2004) 1506–1518.
7. G. E. Hinton, S. Osindero, Y. W. Teh, *A fast learning algorithm for deep belief nets*, MIT Press, 2006.
8. J. Ren, Ann vs. svm: Which one performs better in classification of mccs in mam-mogram imaging, *Knowledge-Based Systems* 26 (2012) 144–153.

9. A. S. Ahmad, M. Y. Hassan, M. P. Abdullah, H. A. Rahman, F. Hussin, H. Abdullah, R. Saidur, A review on applications of ann and svm for building electrical energy consumption forecasting, *Renewable & Sustainable Energy Reviews* 33 (2) (2014) 102–109.
10. H. Zhao, General vector machine, arXiv preprint.
11. B. Yong, F. Li, Q. Lv, J. Shen, Q. Zhou, Derivative-based acceleration of general vector machine, *Soft Computing* 23 (3) (2019) 987–995.
12. B. Yong, Z. Xu, J. Shen, H. Chen, Y. Tian, Q. Zhou, Neural network model with monte carlo algorithm for electricity demand forecasting in queensland 47 (2017) 1–7.
13. B. Yong, J. Shen, Z. Shen, H. Chen, X. Wang, Q. Zhou, Gvm based intuitive simulation web application for collision detection, *Neurocomputing* 279 (2) (2017) 63–73.
14. B. Yong, L. Huang, F. Li, J. Shen, X. Wang, Q. Zhou, A research of monte carlo optimized neural network for electricity load forecast, *The Journal of Supercomputing* (2019) 1–14.
15. C. Yang, G. Deconinck, W. Gui, An optimal power-dispatching control system for the electrochemical process of zinc based on backpropagation and hopfield neural networks, *IEEE Transactions on Industrial Electronics* 50 (5) (2003) 953–961.
16. M. V. Suganyadevi, C. K. Babulal, Support vector regression model for the prediction of loadability margin of a power system, *Applied Soft Computing Journal* 24 (2014) 304–315.
17. A. Selakov, S. Mellon, D. Bekut, Hybrid pso-svm method for short-term load forecasting during periods with significant temperature variations in city of burbank, *Applied Soft Computing* 16 (3) (2014) 80–88.
18. G. Zahedi, S. Azizi, A. Bahadori, A. Elkamel, S. R. W. Alwi, Electricity demand estimation using an adaptive neuro-fuzzy network: A case study from the ontario province canada, *Energy* 49 (1) (2013) 323–328.
19. P. Morris, D. Vine, L. Buys, Application of a bayesian network complex system model to asuccessful community electricity demand reduction program, *Energy* 84 (2015) 63–74.